Memory Craft
Clothsetter II

832-424-409
Printed in Japan

How to use the Clothsetter

Use the Clothsetter when combining individual designs to make one large embroidered design. Before using the Clothsetter, an initial adjustment is necessary.

How to adjust

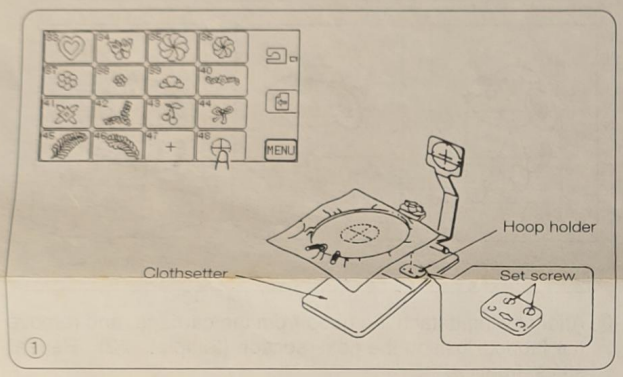

① Insert Memory Card 102 in the machine, choose the pattern for adjustment (the adjustment pattern in Memory Card 102 is #48.)
Attach fusible interfacing to your fabric. Set the fabric in the round embroidery hoop and sew.

- Use the round embroidery hoop with the Clothsetter.
- Do not use a stretchy material such as knit.

Remove the hoop from the carriage. With the fabric still in place, position it on the hoop holder. (Leave the set screws loose.)

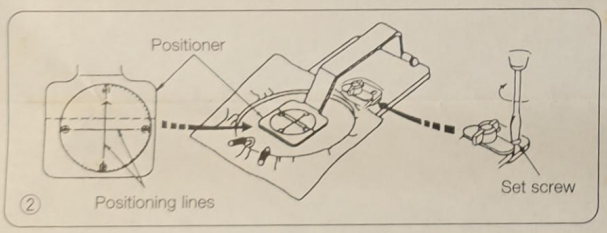

② Swing the positioner down on the fabric. Match the positioning lines of TEST PATTERN 48 with the lines on the positioner by adjusting the position of the hoop holder.
Tighten the two set screws.
After tightening the screws, check to make sure that the positioning lines match up.
Once the position of the hoop holder has been adjusted, no more adjustment is necessary unless another sewing machine is used or the set screws become loose.
After the adjustment has been made, refer to the sewing instruction, ´´How to make a large combination embroidery design´´ in the Memory Card container.

The Clothsetter can also be used for Memory Cards with combination designs such as Memory Card 6 (Floral Series), Memory Card 10(Applique Series), and Memory Card 1.

Examples of Memory Cards (excluding large pattern embroidery combinations)

Memory Card 6: Floral Design Series

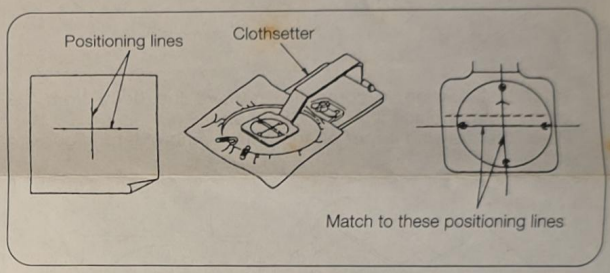

① Draw positioning lines on the fabric.
② Match the positioning lines of the fabric with the lines on the Clothsetter. Secure the fabric in the embroidery hoop.
③ Remove the hoop from the Clothsetter, and attach it to the sewing machine.
④ Select a pattern, and sew.
⑤ After sewing is complete, draw the next positioning lines and connect the designs following steps ②, ③ and ④.

How to make a large embroidery design with Scan'n Sew

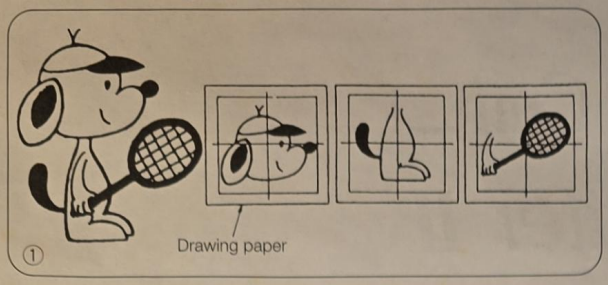

① Divide the picture into sections that will fit on the drawing paper.
Trace each section into the drawing paper.
Try to divide your picture into distinct parts (example: head, trunk etc.)
Scan each traced section and memorize it in the card.
Test-sew each section.

- Use a round embroidery hoop.
- Use a fabric without stretch for test sewing.

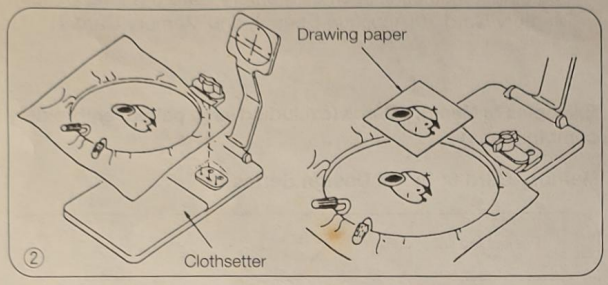

② After test sewing is complete, remove the hoop from the carriage, and place it on the Clothsetter.
Place the drawing paper on top of test-embroidered figure.

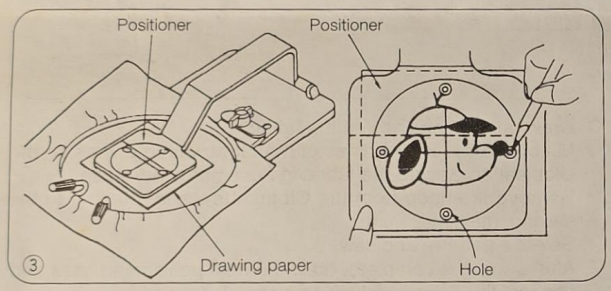

③ Swing the positioner down on the paper.
Holding the positioner down by hand, use a pencil to draw positioning marks on the paper through the four holes.

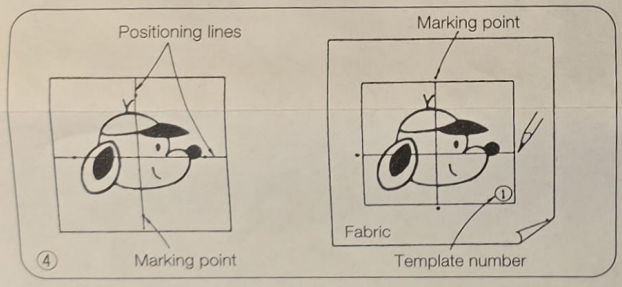

④ Draw positioning lines, connecting the marked points as illustrated, extending the lines to the edges of the paper.
Use the paper as a template.

- Cut the paper to about 7~8 centimeters square, to facilitate use.
Make templates for the other sections following the same procedures.
Decide what order the sections should be sewn in and write this number on each of the templates.
Position the template on the garment, tablecloth, etc. as desired.
Mark points as illustrated.

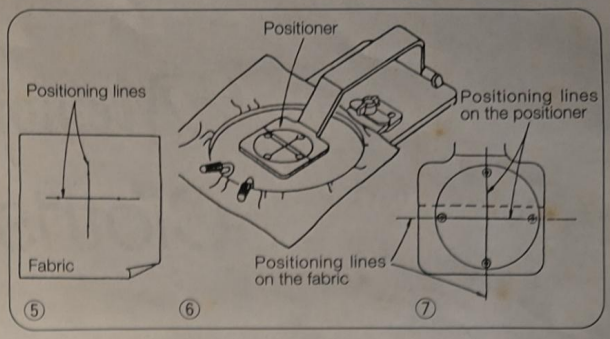

⑤ Draw positioning lines by connecting the marked points.
⑥ Place the embroidery hoop on the Clothsetter.
Place the fabric (on which positioning lines have been draw) on the embroidery hoop. Swing the positioner down.
⑦ Position the fabric in the hoop and match the lines on the fabric with the lines on the positioner.
Remove the hoop from the Clothsetter making sure the positioning lines on the fabric overlap those on the template.
Attach the hoop to the sewing machine carriage.

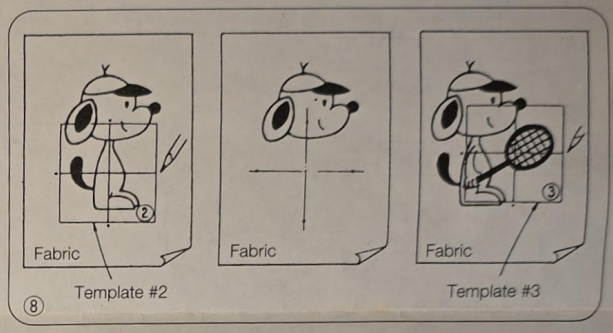

⑧ After sewing,detach the hoop from the carriage, and remove the fabric. Position the next section (template #2). Repeat steps from ⑤.
Sew third section in the same manner as second section.